


# Dishwasher N700



## FEATURES

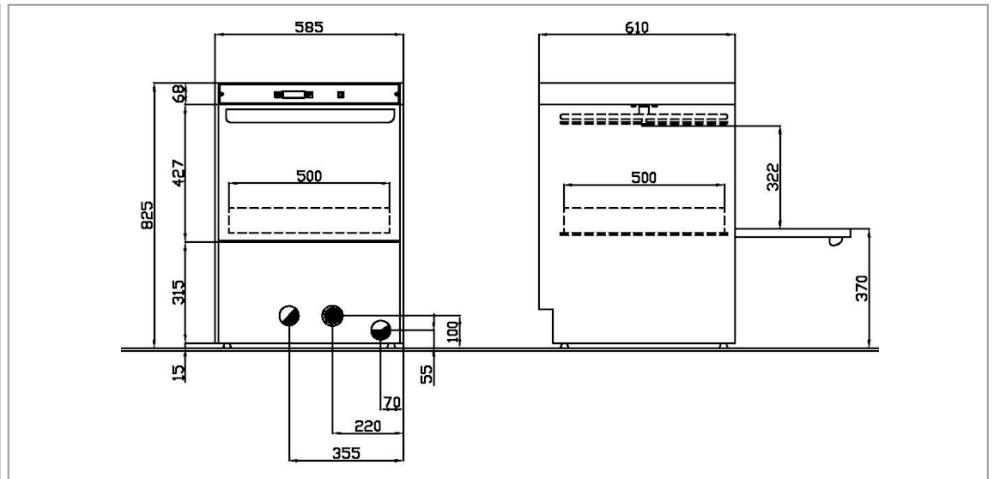

- ❖ Insulated double skin cabinet construction reduces energy costs and noise levels to an absolute minimum.
- ❖ Double skinned stainless-steel door.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools.
- ❖ Pressed molded baskets supports.
- ❖ Integral peristaltic rinse aid dosing.
- ❖ Mechanical control panel.
- ❖ Thermostatic system for rinse at 85°C.
- ❖ Micro switch door.

## TECHNICAL INFORMATION

code 207005

	(sec.)	Baskets/h	Dishes/h	Glasses/h
Mechanical control panel				
Cycle time I * classic	120	32	576	1.152
Cycle time II * normal	180	20	360	720
Basket size		500 x 500 mm		
Wash pump: power / capacity		0,4 kW / 261 l/min		
Elements: tank / boiler		2 kW / 4,5 kW		
Water supply: temperature / pressure / hardness		max. 55°C / 200 - 400 kPa / min. 7 max. 12°F **		
Wash temperature / rinse temperature		55°C / 85° C		
Tank capacity / boiler capacity / water consumption per cycle		26 l / 5,5 l / 2,5 l		
Total power / Voltage		4,9 kW - 400 Volt 3/N/ 50 Hz		

## OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

Detergent dosing (PD)	○
Drain pump (PS)	○
Rinse booster pump (PR)	○
Cold rinse after the wash cycle (RF)	○
Internal water softener with automatic cycle (A) with salt low warning lamp	○
Re-direct valve to bypass the wash tank from regeneration water	○
Electronic control panel (EVO)	○
Break tank with rinse booster pump (B)	○
HY-NRG / EVO (atmospheric boiler/rinse booster pump/air break)	○
Baskets	1 open rack, 2 dish rack (18), 1 cutlery basket
Pipes	1 water supply, 1 drain, 1 rinse aid dosing

\* theoretical production with water supply at 50° C \*\* above 12° F we suggest a water softener. Please note that internal water softeners are only suitable for cold water (&lt; 30°C)