


Glasswasher S025 DIGIT



FEATURES

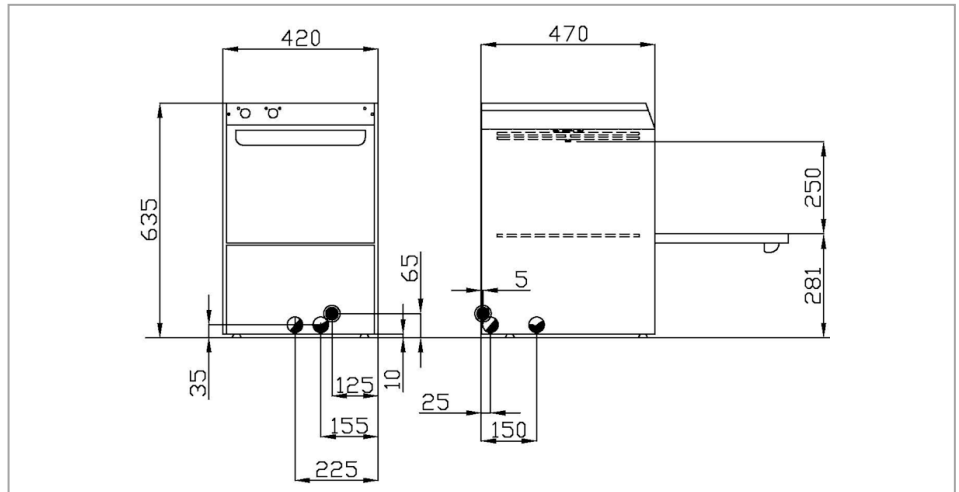

- ❖ Insulated double skin cabinet construction reduces energy costs and noise levels to an absolute minimum.
- ❖ Double skinned stainless-steel door.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools.
- ❖ Pressed molded guides supports.
- ❖ Integral rinse aid dosing.
- ❖ Thermostatic system for rinse at 85°C.
- ❖ Micro switch door.
- ❖ New washing pump designed to guarantee electrical savings but also a higher washing performance.
- ❖ Double filters in the wash tank.
- ❖ Low voltage digit control panel for safety use

TECHNICAL INFORMATION

	Code		
	(sec.)	Baskets/h	Glasses/h
Digit control panel			
Cycle time I*	120	30	480
Cycle time II*	180	20	320
Basket size	350 x 350 mm		
Wash pump: power / capacity	0,17 kW / 109 l/min		
Elements: tank / boiler	1,6 kW / 2,6 kW		
Water supply: temperature / pressure / hardness	max. 55°C / 200-400 kPa / min. 7 max. 12°F **		
Wash temperature / rinse temperature	55°C / 85°C		
Tank capacity / boiler capacity / water consumption per cycle	11 l / 2,7 l / 2,4 l		
Total power / Voltage	2,77 kW / 230 Volt 1 ~50 Hz		

OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

Detergent dosing (PD)	○
Drain pump (PS)	○
Rinse booster pump (PR)	○
Cold rinse after the wash cycle (RF)	○
Internal water softener (A) with salt low warning lamp	○
Electronic control panel (EVO)	○
Baskets	2 glass basket, 1 teaspoon rack
Pipes	1 water supply, 1 drain, 1 rinse aid dosing

* theoretical production with water supply at 50° C ** above 12° F we suggest a water softener. Please note that internal water softeners are only suitable for cold water (< 30°C)