


Potwasher LP57 EVOHY-NRG



FEATURES

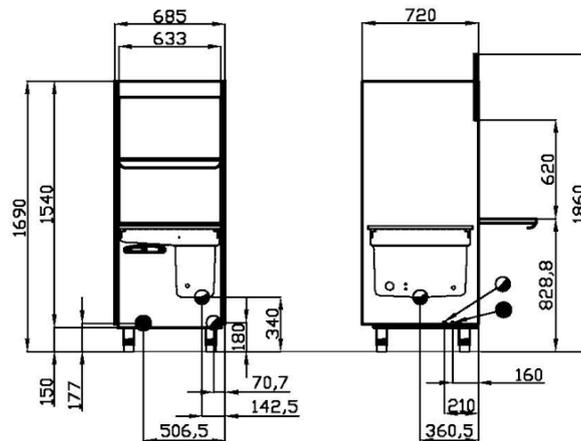

- ❖ Insulated double skin cabinet construction reduces energy costs, noise levels and keeps the wash area ambient temperature, to an absolute minimum.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools.
- ❖ Pressed molded wash tank with radial corners with sloping bottom and double inox filters for hygiene and easy maintenance.
- ❖ High efficiency, self draining wash pump for greater hygiene and ultimate washing power.
- ❖ Integral peristaltic rinse aid dosing.
- ❖ EVO electronic control panel with LCD display.
- ❖ Energy saver on stand-by mode
- ❖ Thermostatic system for rinse at 85°C.
- ❖ Micro safety switch door.
- ❖ Air trap device.
- ❖ HY-NRG system : the atmospheric boiler assure the rinse temperature at 85°C and the rinse booster pump a stable rinse water pressure during the entire rinse.
- ❖ Auto-self cleaning wash tank cycle at the end of the day.
- ❖ Hygienic wash cycle: wash at 65°C and rinse at 85°C.
- ❖ Clean water fonction: automatic drain of wash tank water after 3 hours of inactivity while machine is off (only with drain pump).

TECHNICAL INFORMATION

Code

| | (sec.) | Baskets/h |
|---|---|-----------|
| Digit control panel with LCD display | | |
| Cycle time I * express | 60 | 60 |
| Cycle time II * classic | 120 | 32 |
| Cycle time III * normal | 180 | 20 |
| Cycle time IV * on-going | 480 | 8 |
| Cycle time V * hygienic | 180 | 20 |
| Basket size | 570 x 620 mm | |
| Wash pump: power / capacity | 1,42 kW / 644 l/min | |
| Rinse booster pump: power / capacity | 0,18 kW / 130 l/min | |
| Elements: tank / boiler | 3 kW / 10 kW | |
| Water supply: temperature / pressure / hardness | max. 55°C // 200 - 400 kPa // min. 7 max. 12°F ** | |
| Wash temperature / rinse temperature | 55°C / 85°C | |
| Tank capacity / boiler capacity / water consumption per cycle | 30 l / 9 l / 2,8 l | |
| Total power / Voltage | 11,42 kW - 400 Volt 3/N/ 50 Hz | |

OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

| | |
|--|--|
| Detergent dosing (PD) | ○ |
| Drain pump without overflow pipe (PS) | ○ |
| Internal water softener with automatic cycle (A) and salt low warning lamp | ○ |
| Re-direct valve to bypass the wash tank from regeneration water | ○ |
| Baskets | 1 universal, 1 tray support, 1 teaspoon rack |
| Pipes | 1 water supply, 1 drain, 1 rinse aid dosing |

* theoretical production with water supply at 50° C ** above 12° F we suggest a water softener: please note that internal water softeners are only suitable for cold water (< 30°C)