


# Washer N700 EVO HY-NRG



## CARATTERISTICHE

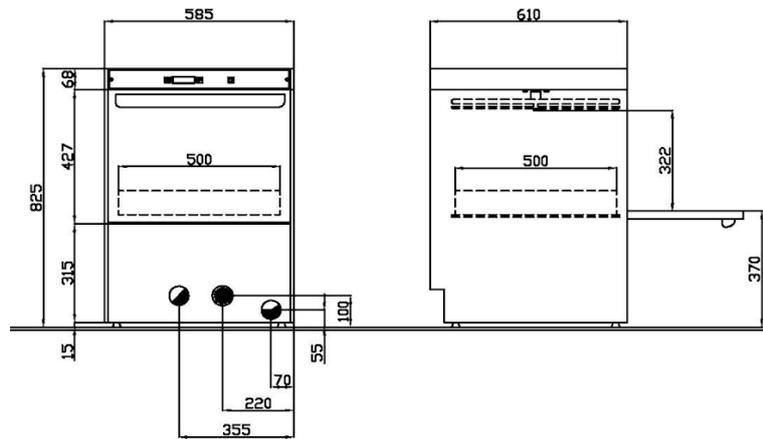

- ❖ Insulated double skin cabinet construction reduces energy costs, noise levels and keeps the wash area ambient temperature, to an absolute minimum.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools..
- ❖ Pressed molded wash tank with radial corners with sloping bottom and double inox filters for hygiene and easy maintenance Insulated door.
- ❖ Integral peristaltic rinse aid dosing.
- ❖ EVO electronic control panel with LCD display,.
- ❖ Energy saver on stand-by mode.
- ❖ Sistema termostatico per il controllo del risciacquo a 85°C.
- ❖ Apertura di lavaggio utile di 32 cm.
- ❖ HY-NRG system : the atmospheric boiler assure the rinse temperature at 85°C and the rinse booster pump a stable rinse water pressure during the entire rinse.
- ❖ Air trap device.
- ❖ Auto-self cleaning wash tank cycle at the end of the day.
- ❖ Hygienic wash cycle: wash at 65°C and rinse at 85°C.

## TECHNICAL INFORMATION

Code

	(sec.)	baskets/h	Dishes/h	Glasses/h
Digit control panel with LCD display				
Cycle time I * express	60	60	1.080	2.160
Cycle time II * classic	120	30	540	1.080
Cycle time III * normal	180	20	360	720
Cycle time IV * on-going	480	8	144	288
Cycle time V * "beer" with 8" cold rinse (optional)	128	28	504	1.080
Cycle time V * hygienic	180	20	360	720
Basket size		500 x 500 mm		
Wash pump: power / capacity		0,4 kW / 261 l/min		
Rinse booster pump: power / capacity		0,18 kW / 130 l/min		
Elements: tank / boiler * load switching		2 kW / 4,5 kW		
Water supply: temperature / pressure / hardness		max. 55°C / 200 - 400 kPa / min. 7 max. 12°F **		
Wash temperature / rinse temperature		55°C / 85° C		
Tank capacity / boiler capacity / water consumption per cycle		26 l / 5,5 l / 2,5 l		
Total power / Voltage		4,9 kW - 400 Volt 3/N/ 50 Hz		

## OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

Detergent dosing (PD)	○
Drain pump without overflow pipe (PS)	○
Internal water softener with automatic cycle (A) and salt low warning lamp	○
Re-direct valve to bypass the wash tank from regeneration water	○
Baskets	○
Pipes	1 universal, 1 tray support, 1 teaspoon rack
Detergent dosing (PD)	1 water supply, 1 drain, 1 rinse aid dosing

\* theoretical production with water supply at 50°C \*\* above 12° F we suggest a water softener. Please note that internal water softeners are only suitable for cold water (< 30°C)