


# Washer N800 EVO HY-NRG



## FEATURES

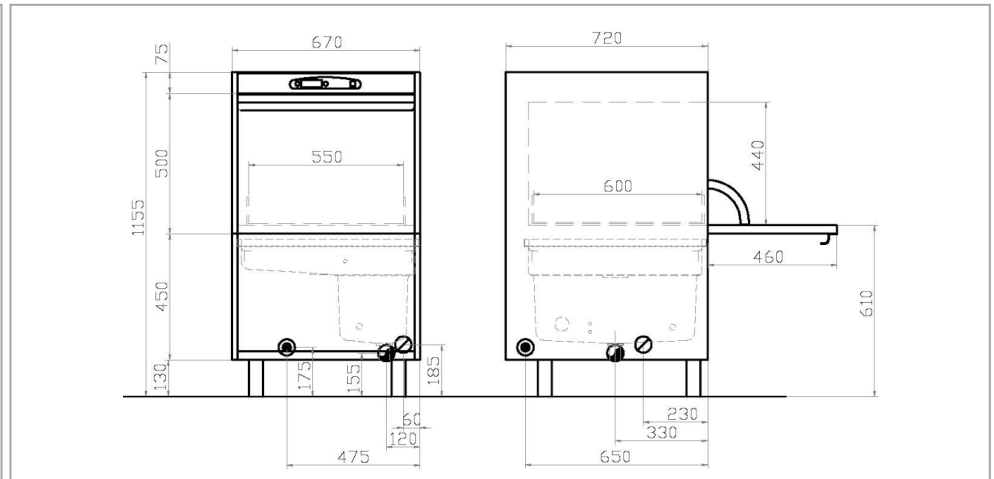

- ❖ Insulated double skin cabinet construction reduces energy costs, noise levels and keeps the wash area ambient temperature, to an absolute minimum.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools.
- ❖ Pressed molded wash tank with radial corners with sloping bottom and double inox filters for hygiene and easy maintenance.
- ❖ High efficiency, self-draining wash pump for greater hygiene and ultimate washing power.
- ❖ Integral peristaltic rinse aid dosing.
- ❖ EVO electronic control panel with LCD display.
- ❖ Energy saver on stand-by mode
- ❖ Thermostatic system for rinse at 85°C.
- ❖ Micro safety switch door.
- ❖ Air trap device.
- ❖ HY-NRG system : the atmospheric boiler assure the rinse temperature at 85°C and the rinse booster pump a stable rinse water pressure during the entire rinse.
- ❖ Auto-self cleaning wash tank cycle at the end of the day.
- ❖ Hygienic wash cycle: wash at 65°C and rinse at 85°C.

## TECHNICAL INFORMATION

Code

	(sec.)	Baskets/h
Digit control panel with LCD display		
Cycle time I * express	60	60
Cycle time II * classic	120	32
Cycle time III * normal	180	20
Cycle time IV * on-going	480	8
Cycle time V * hygienic	180	20
Basket size	570 x 620 mm	
Wash pump: power / capacity	0,75 kW / 317 l/min	
Rinse booster pump: power / capacity	0,18 kW / 130 l/min	
Elements: tank / boiler * load switching	2 kW / 6 kW	
Water supply: temperature / pressure / hardness	max. 55°C // 200 - 400 kPa // min. 7 max. 12°F **	
Wash temperature / rinse temperature	55°C / 85°C	
Tank capacity / boiler capacity / water consumption per cycle	20 l / 7 l / 2,5 l	
Total power / Voltage	6,75 kW - 400 Volt 3/N/ 50 Hz	

## OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

Detergent dosing (PD)	○
Drain pump without overflow pipe (PS)	○
Internal water softener with automatic cycle (A) and salt low warning lamp	○
Re-direct valve to bypass the wash tank from regeneration water	○
Baskets	1 universal, 1 tray support, 1 teaspoon rack
Pipes	1 water supply, 1 drain, 1 rinse aid dosing

\* theoretical production with water supply at 50° C \*\* above 12° F we suggest a water softener. Please note that internal water softeners are only suitable for cold water (< 30°C)