


Dishwasher N1300XL EVOHY-NRG



FEATURES

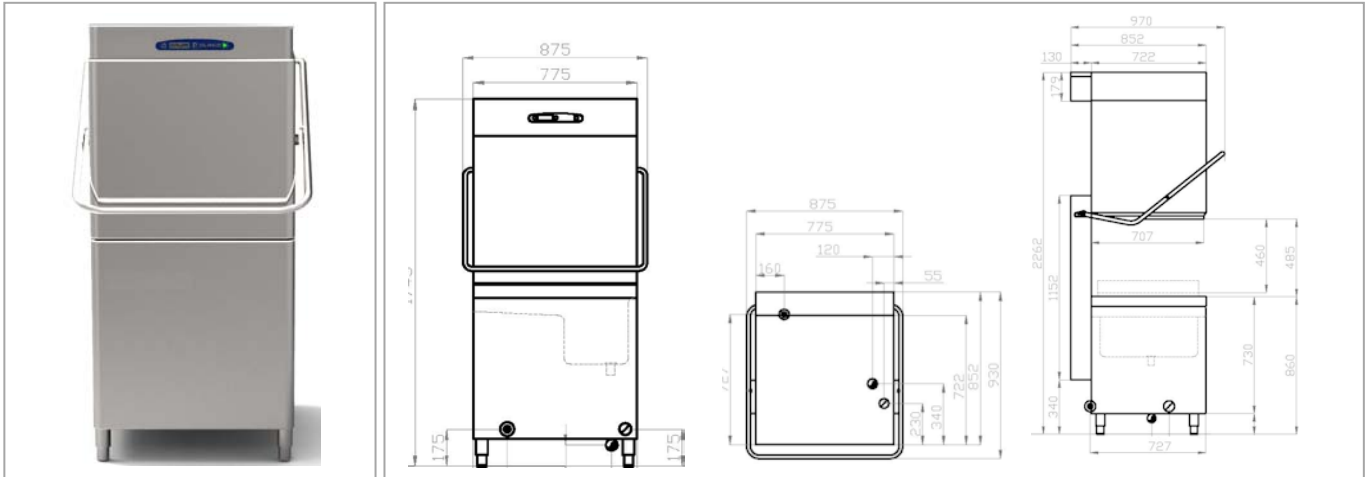

- ❖ Insulated double skin cabinet construction reduces energy costs, noise levels and keeps the wash area ambient temperature, to an absolute minimum.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools.
- ❖ Pressed molded wash tank with radial corners with sloping bottom and double inox filters for hygiene and easy maintenance.
- ❖ High efficiency, self draining wash pump for greater hygiene and ultimate washing power.
- ❖ Integral peristaltic rinse aid dosing.
- ❖ EVO electronic control panel with LCD display.
- ❖ Energy saver on stand-by mode
- ❖ Thermostatic system for rinse at 85°C.
- ❖ Micro safety switch hood.
- ❖ Air trap device.
- ❖ HY-NRG system : the atmospheric boiler assure the rinse temperature at 85°C and the rinse booster pump a stable rinse water pressure during the entire rinse.
- ❖ Auto-self cleaning wash tank cycle at the end of the day.
- ❖ Hygenic wash cycle: wash at 65°C and rinse at 85°C.
- ❖ Clean water fonction: automatic drain of wash tank water after 3 hours of inactivity while machine is off (only with drain pump).

TECHNICAL INFORMATION

Code

	(sec.)	Baskets/h
Digit control panel with LCD display		
Cycle time I * express	60	60
Cycle time II * classic	120	30
Cycle time III * normal	180	20
Cycle time IV * on-going	480	8
Cycle time V * hygenic	180	20
Basket size	570 x 620 mm	
Wash pump: power / capacity	1,42 kW / 644 l/min	
Rinse booster pump: power / capacity	0,18 kW / 130 l/min	
Elements: tank / boiler	3 kW / 6 kW	
Water supply: temperature / pressure / hardness	max. 55°C // 200 - 400 kPa // min. 7 max. 12°F **	
Wash temperature / rinse temperature	55°C / 85°C	
Tank capacity / boiler capacity / water consumption per cycle	35 l / 7 l / 3 l	
Total power / Voltage	7,42 kW - 400 Volt 3/N/ 50 Hz	

OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

Detergent dosing (PD)	○
Drain pump without overflow pipe (PS)	○
Internal water softener with automatic cycle (A) and salt low warning lamp	○
Re-direct valve to bypass the wash tank from regeneration water	○
Control panel placed on the hood	●
Baskets	1 open rack, 1 dish rack (18), 1 cutlery basket
Pipes	1 water supply, 1 drain, 1 rinse aid dosing

* theoretical production with water supply at 50° C ** above 12° F we suggest a water softener: please note that internal water softeners are only suitable for cold water (< 30° C)