


# Dishwasher NE1300 ECO



## FEATURES

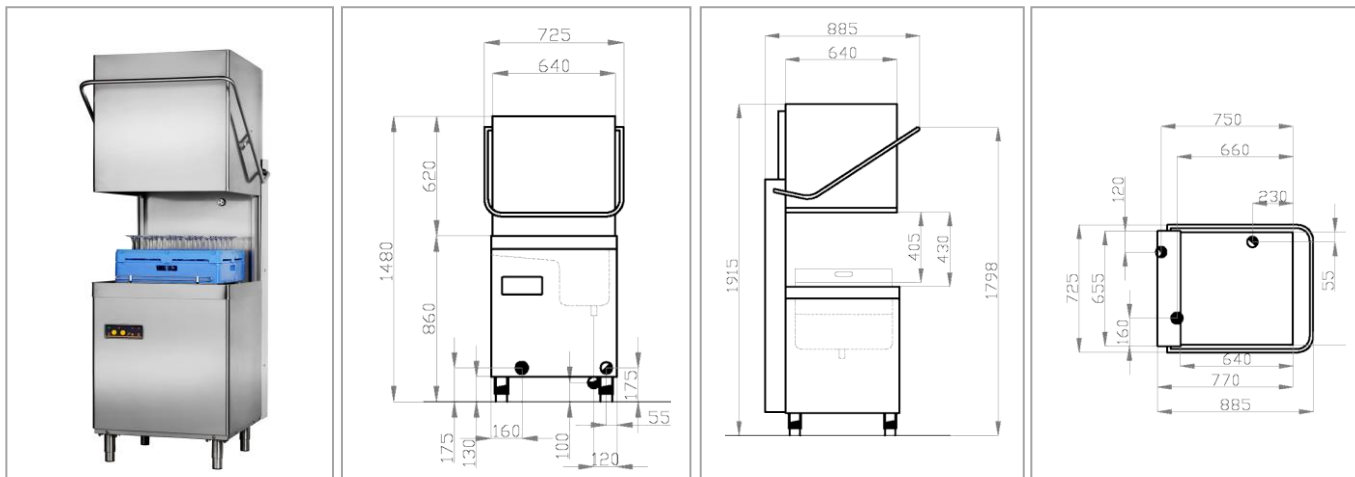

- ❖ Performance, reliability, safety standard, easy to use and robustness are the key features for our hood dishwashers.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools.
- ❖ Welded wash tank with sloping bottom and double inox filters for hygiene and easy maintenance.
- ❖ High efficiency, self-draining wash pump for greater hygiene and ultimate washing power.
- ❖ Integral peristaltic rinse aid dosing.
- ❖ Mechanical control panel.
- ❖ Thermostatic system for rinse at 85°C.
- ❖ Micro safety switch hood.

## TECHNICAL INFORMATION

Code 201620

|   | (sec.) | Baskets/h   | Dishes/h | Glasses/h |
|---|--------|---|----------|-----------|
| Mechanical control panel                                      |        |   |          |           |
| Cycle time I *  | 75     | 48  | 864      | 1.728     |
| Cycle time II *   | 120    | 30  | 540      | 1.080     |
| Cycle time III *  | 180    | 20  | 360      | 720       |
| Basket size   |        | 500 x 500 mm                                      |          |           |
| Wash pump: power / capacity                                   |        | 1,1 kW / 503 l/min                                |          |           |
| Elements: tank / boiler                                       |        | 3 kW / 6 kW                                       |          |           |
| Water supply: temperature / pressure / hardness               |        | max. 55°C // 200 - 400 kPa // min. 7 max. 12°F ** |          |           |
| Wash temperature / rinse temperature                          |        | 55°C / 85° C                                      |          |           |
| Tank capacity / boiler capacity / water consumption per cycle |        | 30 l / 5,5 l / 2,8 l                              |          |           |
| Total power / Voltage   |        | 7,1 kW - 400 Volt 3/N/ 50 Hz                      |          |           |

## OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

|   |   |
|---|---|
| Detergent dosing (PD)   | ○   |
| Drain pump (PS)   | ○   |
| Rinse booster pump (PR)   | ○   |
| Internal water softener (A) with salt low warning lamp          | ○   |
| Re-direct valve to bypass the wash tank from regeneration water | ○   |
| Electronic control panel (EVO)                                  | ○   |
| Break tank with rinse booster pump (B)                          | ○   |
| HY-NRG / EVO (atmospheric boiler/rinse booster pump/air break)  | ○   |
| Insulated double skin panel hood                                | ○   |
| Temperatures thermometers                                       | ○   |
| Baskets   | 1 open rack, 1 dish rack (18), 1 cutlery basket |
| Pipes   | 1 water supply, 1 drain, 1 rinse aid dosing     |

\* theoretical production with water supply at 50° C \*\* above 12° F we suggest a water softener. Please note that internal water softeners are only suitable for cold water (&lt; 30°C)