


# Glasswasher S026



## FEATURES

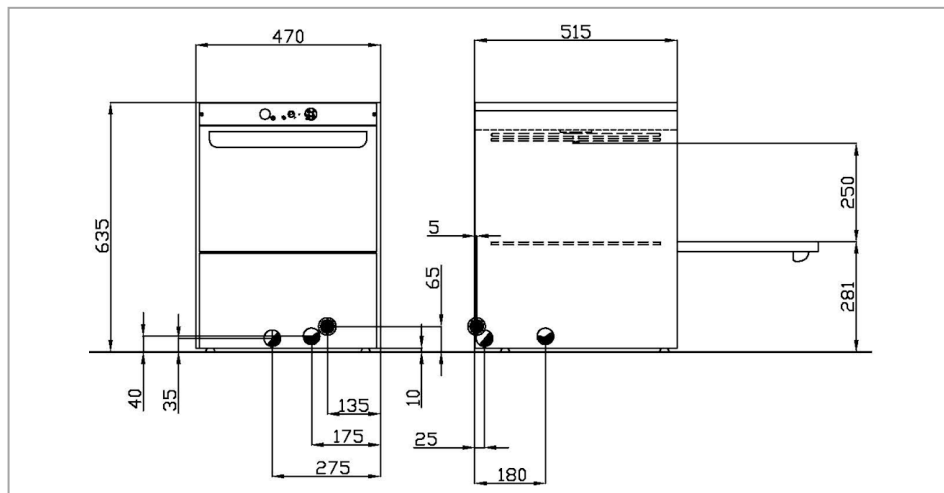

- ❖ Insulated double skin cabinet construction reduces energy costs and noise levels to an absolute minimum.
- ❖ Double skinned stainless-steel door.
- ❖ Specially designed stainless steel, indented anti-clog wash and rinse arms, easily removed for cleaning, without tools.
- ❖ Pressed molded guides supports.
- ❖ Integral rinse aid dosing.
- ❖ Thermostatic system for rinse at 85°C.
- ❖ Micro switch door.
- ❖ New washing pump designed to guarantee electrical savings but also a higher washing performance.
- ❖ Double filters in the wash tank.

## TECHNICAL INFORMATION

Code 200250

|   | (sec.) | Baskets/h                                     | Glasses/h |
|---|--------|---|-----------|
| Mechanical control panel                                      |        |   |           |
| Cycle time *  | 120    | 30  | 750       |
| Basket size   |        | 400 x 400 mm                                  |           |
| Wash pump: power / capacity                                   |        | 0,17 kW / 109 l/min                           |           |
| Elements: tank / boiler                                       |        | 1,6 kW / 2,6 kW                               |           |
| Water supply: temperature / pressure / hardness               |        | max. 55°C / 200-400 kPa / min. 7 max. 12°F ** |           |
| Wash temperature / rinse temperature                          |        | 55°C / 85°C                                   |           |
| Tank capacity / boiler capacity / water consumption per cycle |        | 14 l / 2,7 l / 2,4 l                          |           |
| Total power / Voltage   |        | 2,77 kW / 230 Volt 1 ~50 Hz                   |           |

## OPTIONAL AND EQUIPMENT

● = standard ○ = on demand

|  |   |
|--|---|
| Detergent dosing (PD)                                  | ○   |
| Drain pump (PS)  | ○   |
| Rinse booster pump (PR)                                | ○   |
| Cold rinse after the wash cycle (RF)                   | ○   |
| Internal water softener (A) with salt low warning lamp | ○   |
| Electronic control panel (EVO)                         | ○   |
| Baskets  | 2 glass basket, 1 teaspoon rack             |
| Pipes  | 1 water supply, 1 drain, 1 rinse aid dosing |

\* theoretical production with water supply at 50° C \*\* above 12° F we suggest a water softener. Please note that internal water softeners are only suitable for cold water (&lt; 30°C)