

TECHNICAL DATA SHEET

WAREWASHER

P 57-60 LCD



SILANOS
Clean efficiency

P RANGE - Designed to tackle even the toughest dirt

Silanos pot and utensil washers combine power, durability, and versatility in one solution. Built with an exceptionally robust structure, they are the ideal choice for intensive cleaning of pots, pans, trays, utensils, baskets, and containers of all sizes.

With Silanos, every wash cycle delivers impeccable results, reducing operating times and optimizing efficiency in the kitchen. The reliability of our professional machines makes them the perfect choice for those who demand high performance and long-lasting quality.

Product overview — Standard features

- Advanced LCD control panel – user-friendly yet comprehensive, with extended functionalities and 4 dedicated wash cycles for maximum flexibility.
- 30-liter molded deep-drawn tank with rounded corners and a sloped bottom for easy drainage towards the filters.
- Efficient double filtration system for cleaner wash water and superior results.
- Exclusive Superwash washing impellers, upper and lower, made of stainless steel, and independent stainless steel rinsing impellers, ensuring superior washing results.
- Peristaltic rinse aid dosing.
- Break tank with rinse booster pump
- Self-draining wash pump for maximum hygiene and safety.



P 57-60 LCD

Warewasher

FEATURES

- Control Panel
- Cabinet
- Washing Arm
- Rinse Arm
- Full AISI 304 stainless steel wash tank for maximum hygiene and durability
- Rinse aid Dosing
- Break tank and rinse booster pump
- Drain Pump
- Detergent Dosing
- CRV - Heat Recovery and Steam Condenser 0,12kW

Standard

- LCD
- Double Skin
- 2 - SuperWash
- 2 - Nozzles
-
- Peristaltic
-

Optional

-
-
-

TECHNICAL FEATURES





External Dimensions	685x720x1690	WxDxH mm
Overall Open Door	1075	mm
	1860	mm
Maximum Washing Height	620	mm
Clearance	430	mm
Basket Dimensions	570x620	mm
Tank Dimension	20	lt
Water Consumption	2,6	lt/Cycle
Wash Pump	0,52	kW
Tank Heater Element	2,5	kW
Boiler Heater Element	6	kW
Installed Power	6,52	kW
Washing Cycles	60/120/180/480	Sec
Output Cycles for Hour	60/30/20/8	Cycles/H
Power Supply	400V/3N/50Hz	
Noise	69	dBA
Weight	80	Kg
Inlet water	55/7-12	C/°f
	1,5/3	bar

ACCESSORIES

Hoses (1 per each): Water Loading/Draining, Transparent for rinse aid with dipstick

Baskets: 1x24 Plates, 1 Universal Basket, 2 Cutlery Basket, 1x9 Baking Tray Rack

TECHNICAL DRAWINGS

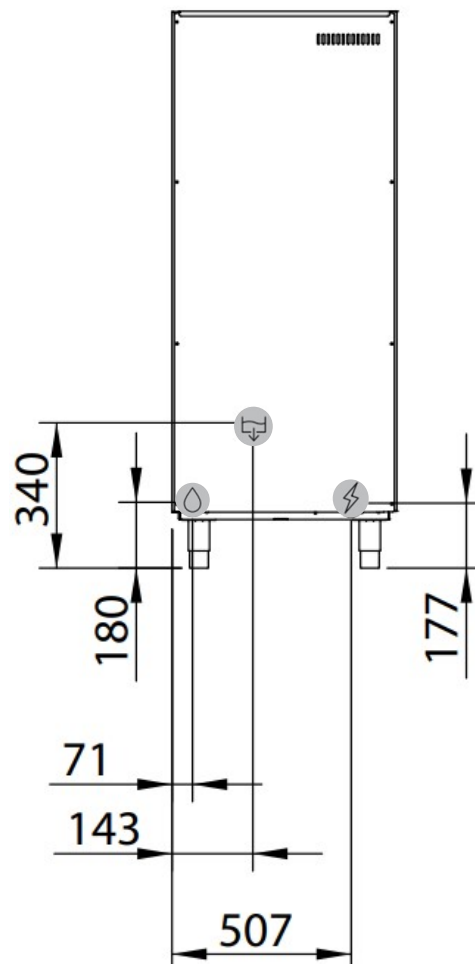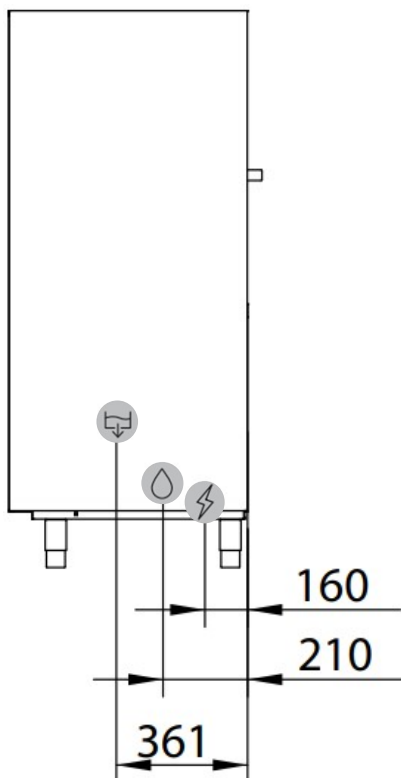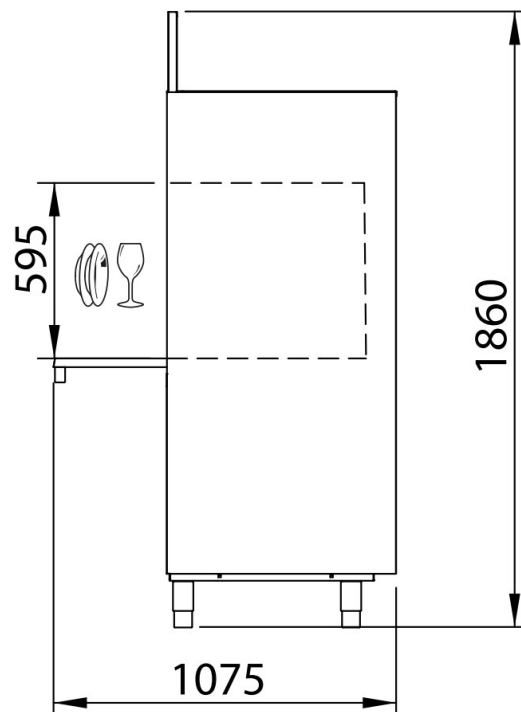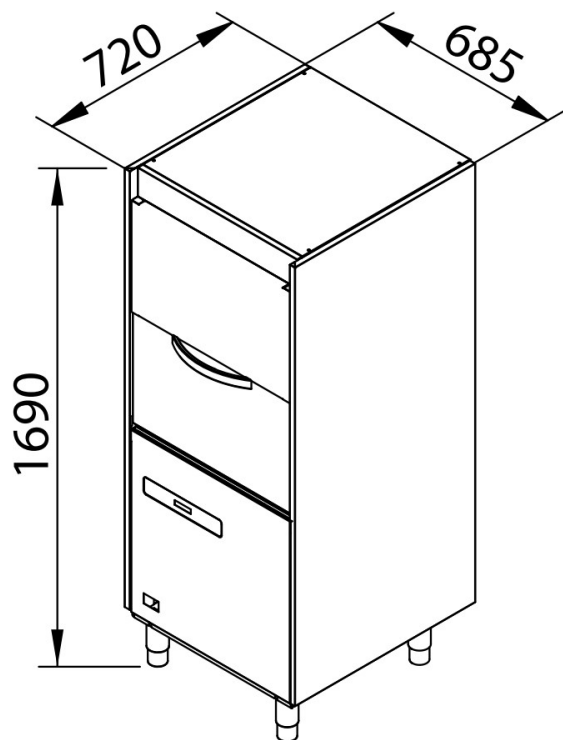

The data, information, and images contained in this document are for informational purposes only and do not constitute a contractual obligation. The company reserves the right to update them without prior notice.

NOTE TECNICHE

LAVAOGGETTI

P 57-60 LCD



SILANOS
Clean efficiency

P RANGE - Progettate per affrontare lo sporco più ostinato.

Le lavapentole e lavaoggetti Silanos uniscono potenza, robustezza e versatilità in un'unica soluzione. Grazie alla loro struttura estremamente resistente, sono lo strumento ideale per il lavaggio intensivo di pentole, padelle, teglie, utensili, ceste e contenitori di ogni dimensione.

Con Silanos, ogni ciclo di lavaggio garantisce risultati impeccabili, riducendo i tempi operativi e ottimizzando l'efficienza in cucina. L'affidabilità delle nostre macchine professionali le rende la scelta perfetta per chi cerca prestazioni elevate e durata nel tempo.

Panoramica del prodotto — Caratteristiche standard

- Pannello di controllo LCD avanzato – intuitivo e completo, con funzionalità estese e 4 cicli di lavaggio dedicati per la massima flessibilità.
- Vasca di lavaggio stampata da 30 lt. in acciaio inox AISI 304, con angoli arrotondati e fondo inclinato verso il filtro.
- Efficiente sistema di doppia filtrazione per acqua di lavaggio più pulita e risultati superiori.
- Esclusive giranti di lavaggio superwash, inferiori e superiori e giranti di risciacquo indipendenti in acciaio inox, per garantire risultati di lavaggio superiori.
- Dosaggio del brillantante tramite pompa peristaltica.
- Breaktank con pompa di aumento pressione.
- Pompa di lavaggio autosvuotante per massima igiene e sicurezza.



P 57-60 LCD

Lavaoggetti

CARATTERISTICHE

Pannello comandi
 Carrozzeria
 Giranti Lavaggio
 Giranti Risciacquo
 Vasca di lavaggio in acciaio inossidabile AISI 304 per la massima igiene e durata
 Dosatore brillantante
 Break tank e pompa di risciacquo potenziata
 Pompa scarico
 Dosatore detersivo
 CRV - Recuperatore di calore e aspira vapori 0,12kW

Standard

LCD
 Doppia Parete
 2 - SuperWash
 2 - Nozzles
 •
 Peristaltico
 •

Optional

•
•
•

DATI TECNICI

Dimensioni Esterne	685x720x1690	LxPxH mm
Ingombro porta aperta	1075 1860	mm
Altezza massima lavaggio	620	mm
Passaggio Utile	430	mm
Dimensioni cestello	570x620	mm
Volume vasca	20	lt
Consumo Acqua	2,6	lt/Ciclo
Pompa lavaggio	0,52	kW
Resistenza vasca	2,5	kW
Resistenza boiler	6	kW
Potenza installata	6,52	kW
Cicli lavaggio	60/120/180/480	Sec
Produzione oraria	60/30/20/8	Cicli/H
Alimentazione Elettrica	400V/3N/50Hz	
Rumorosità	69	dBA
Peso	80	Kg
Acqua di alimentazione	55/7-12 1,5/3	C/°f bar

ACCESSORI

Tubi (1 per tipo): Carico/Scarico acqua, Trasparente per brillantante con pescante
 Cestelli: 2x18 Piatti, 1 Cesto Universale, 2 Porta Posate, 1x9 Porta Teglie

DISEGNI TECNICI

