

TECHNICAL DATA SHEET

WAREWASHER

P 115-83 LCD



SILANOS
Clean efficiency

P RANGE - Designed to tackle even the toughest dirt

Silanos pot and utensil washers combine power, durability, and versatility in one solution. Built with an exceptionally robust structure, they are the ideal choice for intensive cleaning of pots, pans, trays, utensils, baskets, and containers of all sizes.

With Silanos, every wash cycle delivers impeccable results, reducing operating times and optimizing efficiency in the kitchen. The reliability of our professional machines makes them the perfect choice for those who demand high performance and long-lasting quality.

Product overview — Standard features

- Advanced LCD control panel – user-friendly yet comprehensive, with extended functionalities and 4 dedicated wash cycles for maximum flexibility.
- Molded deep-drawn tank with rounded corners and a sloped bottom for easy drainage towards the filters.
- Efficient double filtration system for cleaner wash water and superior results.
- Powerful 4-arm washing impellers, upper and lower, and independent rinsing impellers in stainless steel, ensuring impeccable washing results.
- Break tank with rinse booster pump
- Powerful self-draining wash pump and high-capacity rinse booster pump.
- Supplementary side wash arms for enhanced cleaning coverage.



P 115-83 LCD

Warewasher

FEATURES

Control Panel	
Cabinet	
Washing Arm	
Rinse Arm	
Full AISI 304 stainless steel wash tank for maximum hygiene and durability	
Rinse aid Dosing	
Break tank and rinse booster pump	
Drain Pump	
Detergent Dosing	
CRV - Heat Recovery and Steam Condenser 0,12kW	

Standard

LCD
Double Skin
4 - PotWashArm
+
2 Side
4 - Nozzles
•
Peristaltic
•

Optional

•
•
•

TECHNICAL FEATURES





External Dimensions	1335x785x2160	WxDxH mm
Overall Open Door	1195	mm
	2440	mm
Maximum Washing Height	835	mm
Clearance	860	mm
Basket Dimensions	615x1150	mm
Tank Dimension	96	lt
Water Consumption	8	lt/Cycle
Wash Pump	N°2 x 2	kW
Tank Heater Element	8	kW
Boiler Heater Element	12	kW
Installed Power	16	kW
Washing Cycles	60/120/180/480	Sec
Output Cycles for Hour	60/30/20/8	Cycles/H
Power Supply	400V/3N/50Hz	
Noise	73	dBA
Weight	285	Kg
Inlet water	55/7-12	C/°f
	1,5/3	bar

ACCESSORIES

Hoses (1 per each): Water Loading

Baskets: 1 Universal Basket, 1x6 Baking Tray Rack

TECHNICAL DRAWINGS

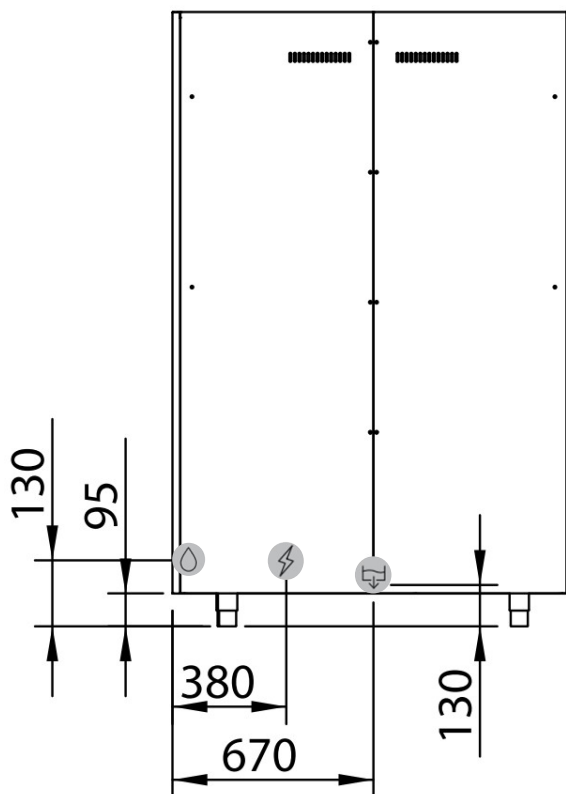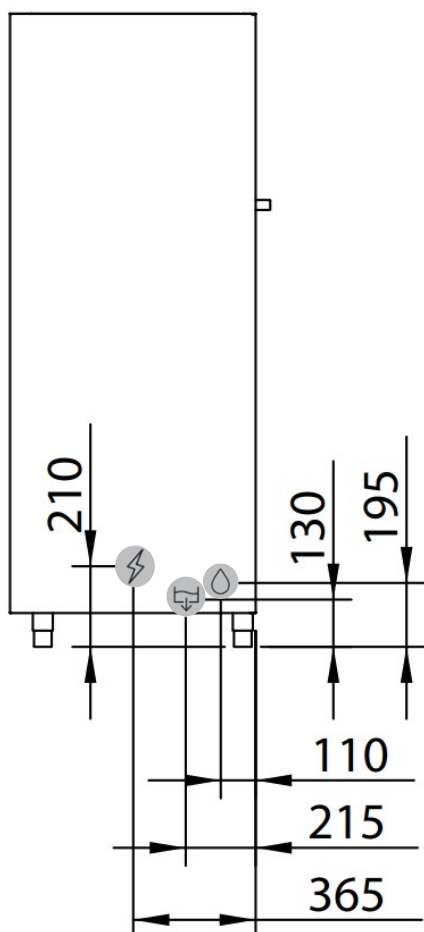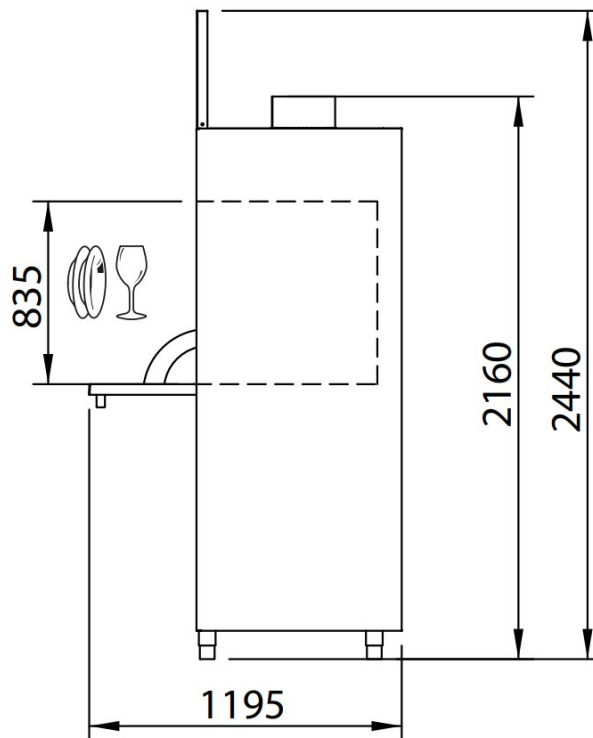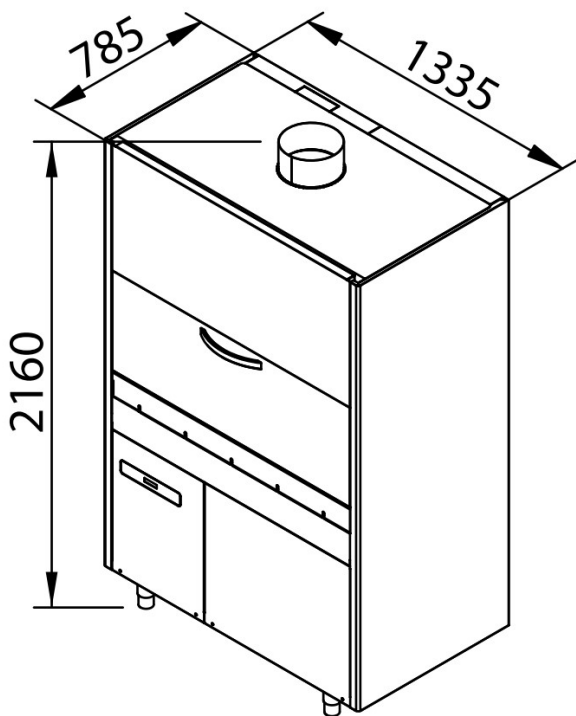

The data, information, and images contained in this document are for informational purposes only and do not constitute a contractual obligation. The company reserves the right to update them without prior notice.

NOTE TECNICHE

LAVAOGGETTI

P 115-83 LCD



SILANOS
Clean efficiency

P RANGE - Progettate per affrontare lo sporco più ostinato.

Le lavapentole e lavaoggetti Silanos uniscono potenza, robustezza e versatilità in un'unica soluzione. Grazie alla loro struttura estremamente resistente, sono lo strumento ideale per il lavaggio intensivo di pentole, padelle, teglie, utensili, ceste e contenitori di ogni dimensione.

Con Silanos, ogni ciclo di lavaggio garantisce risultati impeccabili, riducendo i tempi operativi e ottimizzando l'efficienza in cucina. L'affidabilità delle nostre macchine professionali le rende la scelta perfetta per chi cerca prestazioni elevate e durata nel tempo.

Panoramica del prodotto — Caratteristiche standard

- Pannello di controllo LCD avanzato – intuitivo e completo, con funzionalità estese e 4 cicli di lavaggio dedicati per la massima flessibilità.
- Vasca di lavaggio stampata in acciaio inox AISI 304, con angoli arrotondati e fondo inclinato verso il filtro.
- Efficiente sistema di doppia filtrazione per acqua di lavaggio più pulita e risultati superiori.
- Potenti giranti di lavaggio a 4 bracci, inferiori e superiori e giranti di risciacquo indipendenti in acciaio inox, per garantire risultati di lavaggio impeccabili.
- Breaktank con pompa di aumento pressione.
- Pompa di lavaggio autosvuotante per massima igiene e sicurezza.
- Bracci di lavaggio laterali supplementari.



P 115-83 LCD

Lavaoggetti

CARATTERISTICHE

Pannello comandi	
Carrozzeria	
Giranti Lavaggio	
Giranti Risciacquo	
Vasca di lavaggio in acciaio inossidabile AISI 304 per la massima igiene e durata	
Dosatore brillantante	
Break tank e pompa di risciacquo potenziata	
Pompa scarico	
Dosatore detersivo	
CRV - Recuperatore di calore e aspira vapori 0,12kW	

Standard

LCD
Doppia Parete
4 - PotWashArm
+
2 Laterali
4 - Nozzles
•
Peristaltico
•

Optional

•
•
•

DATI TECNICI

Dimensioni Esterne	1335x785x2160	LxPxH mm
Ingombro porta aperta	1195	mm
	2440	mm
Altezza massima lavaggio	835	mm
Passaggio Utile	860	mm
Dimensioni cestello	615x1150	mm
Volume vasca	96	lt
Consumo Acqua	8	lt/Ciclo
Pompa lavaggio	N°2 x 2	kW
Resistenza vasca	8	kW
Resistenza boiler	12	kW
Potenza installata	16	kW
Cicli lavaggio	60/120/180/480	Sec
Produzione oraria	60/30/20/8	Cicli/H
Alimentazione Elettrica	400V/3N/50Hz	
Rumorosità	73	dBA
Peso	285	Kg
Acqua di alimentazione	55/7-12	C/°f
	1,5/3	bar

ACCESSORI

Tubi (1 per tipo): Carico acqua
Cestelli: 1 Cesto Universale, 1x6 Porta Teglie

DISEGNI TECNICI

