

TECHNICAL DATA SHEET

HOOD

EH 50-40



SILANOS
Clean efficiency

ESSENTIAL RANGE – Efficiency that simplifies everyday work

The **Essential Range** is the smart choice for professionals who value reliability, practicality, and cost-effective performance.

From the compact glasswashers with 35 cm basket to the durable pass-through dishwashers, every model is designed to deliver high efficiency, reduced energy consumption, and maximum results in minimal space.

Featuring a compact single-wall structure, an intuitive mechanical control panel, and integrated functions – such as the wash pump with double filter system in the glasswashers and the built-in rinse aid dispenser across the range – Essential Range offers a solid, straightforward, and uncompromising solution for effortless daily operations.

Product overview – Standard features

- User-friendly electromechanical control panel, built to last.
- 20-liter molded deep-drawn tank with rounded corners and a sloped bottom for easy drainage towards the filters.
- Efficient double filtration system for cleaner wash water and superior results.
- Powerful stainless steel lower and upper wash arms and independent rotating polymer rinse arms for outstanding cleaning results.
- Peristaltic rinse aid dosing.
- 0,52 kW self-draining wash pump for maximum hygiene and safety.


EH 50 - 40

Hood

FEATURES

Control Panel
 Cabinet
 Washing Arm
 Rinse Arm
 Full AISI 304 stainless steel wash tank for maximum hygiene and durability
 Rinse aid Dosing
 Drain Pump
 Detergent Dosing
 Water Softener
 Break Tank and rinse booster pump
 Boosted Boiler 9 kW

Standard
 Electromechanical
 Single Skin
 2 - Stainless Steel
 2 - PP
 •
 Peristaltic

Optional

•
•
•
•
•

TECHNICAL FEATURES





External Dimensions	655x785x1480	WxDxH mm
Overall Open Door	1930	mm
Maximum Washing Height	400	mm
Clearance	430	mm
Basket Dimensions	500x500	mm
Tank Dimension	20	lt
Water Consumption	2,6	lt/Cycle
Wash Pump	0,52	kW
Tank Heater Element	3	kW
Boiler Heater Element	6	kW
Installed Power	6,52	kW
Washing Cycles	120/180	Sec
Output Cycles for Hour	30/20	Cycles/H
Power Supply	400V/3N/50Hz	
Noise	62	dBA
Weight	105	Kg
Inlet water	55/7-12	C/°f
	1,5/3	bar

ACCESSORIES

Hoses (1 per each): Water Loading/Draining, Transparent for rinse aid with dipstick
 Baskets: 1x18 Plates, 1 Universal Basket, 2 Cutlery Basket



TECHNICAL DRAWINGS

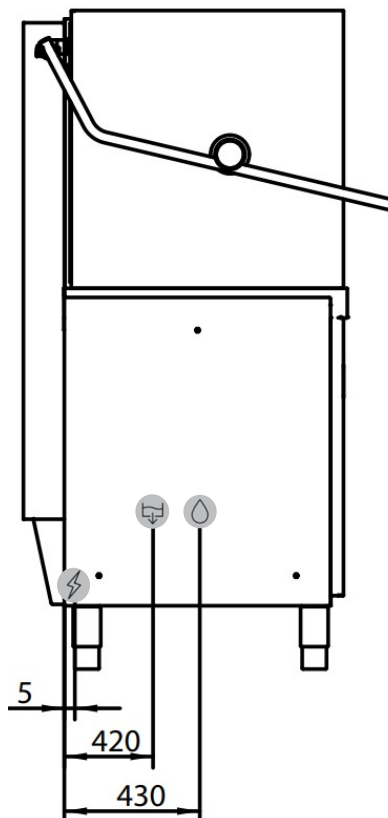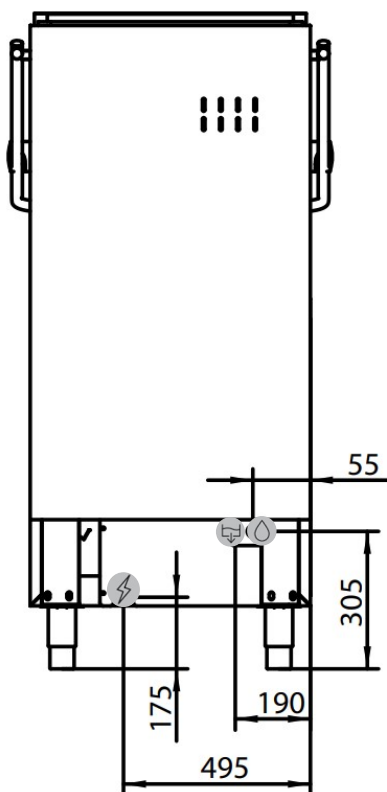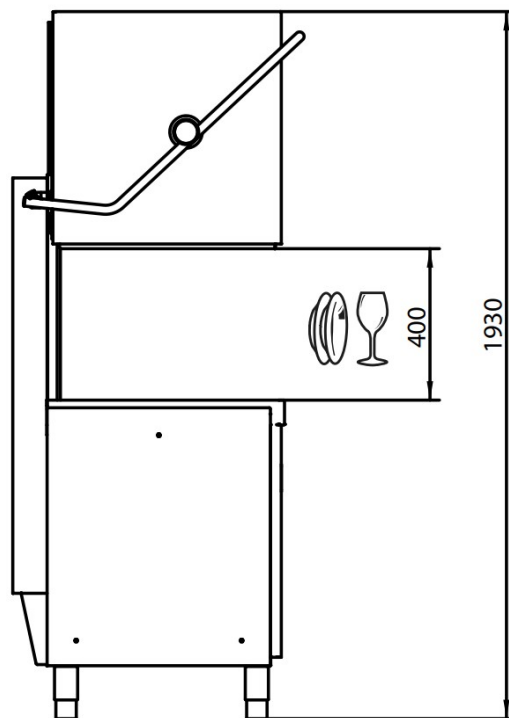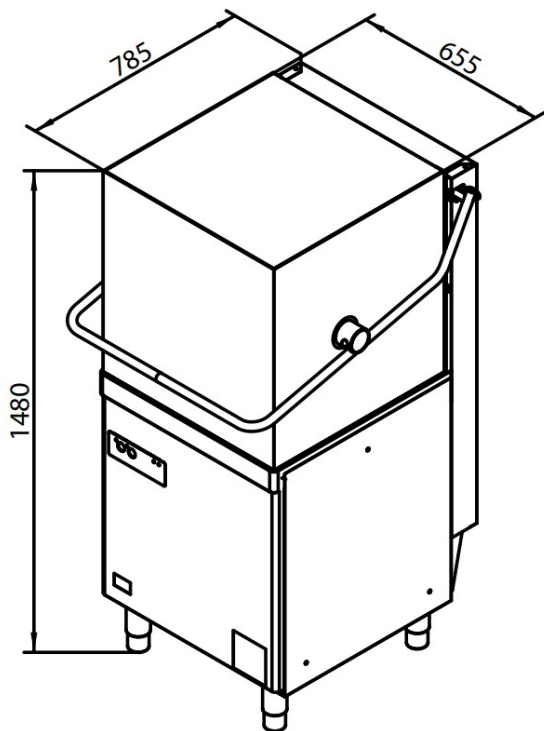

The data, information, and images contained in this document are for informational purposes only and do not constitute a contractual obligation. The company reserves the right to update them without prior notice.

NOTE TECNICHE

CAPOT

EH 50-40



SILANOS
Clean efficiency

ESSENTIAL RANGE – L'efficienza che semplifica il lavoro quotidiano

La linea **Essential Range** è la scelta ideale per chi desidera prestazioni affidabili e immediate nella gestione del lavaggio professionale.

Dalle lavabicchieri compatte con cestello 35 alle lavastoviglie a capot robuste e performanti, ogni modello è studiato per offrire semplicità, solidità e consumi ridotti, ottimizzando gli spazi senza rinunciare alla resa.

Grazie alla struttura monoparete compatta, al pannello comandi meccanico intuitivo e alle funzioni integrate – come la pompa di lavaggio con doppio sistema di filtri nelle lavabicchieri e il dosatore brillantante di serie su tutta la gamma – Essential Range rappresenta la soluzione concreta e funzionale per chi cerca efficienza quotidiana senza compromessi.

Panoramica del prodotto – Caratteristiche standard

- Pannello di controllo eletromeccanico intuitivo, costruito per durare.
- Vasca di lavaggio stampata da 20 lt. in acciaio inox AISI 304, con angoli arrotondati e fondo inclinato verso il filtro.
- Efficiente sistema di doppia filtrazione per acqua di lavaggio più pulita e risultati superiori.
- Potenti giranti di lavaggio, inferiori e superiori, in acciaio inox, e giranti di risciacquo indipendenti in polimero, per garantire risultati di lavaggio eccellenti.
- Dosaggio del brillantante tramite pompa peristaltica.
- Pompa di lavaggio da 0,52 kW autosvuotante per massima igiene e sicurezza.


EH 50 - 40

Capot

CARATTERISTICHE

Pannello comandi
 Carrozzeria
 Giranti Lavaggio
 Giranti Risciacquo
 Vasca di lavaggio in acciaio inossidabile AISI 304 per la massima igiene e durata
 Dosatore brillantante
 Pompa scarico
 Dosatore detersivo
 Addolcitore
 Break tank e pompa di risciacquo potenziata
 Boiler Potenziato 9 kW

Standard
 Elettromeccanico
 Mono Parete
 2 - Inox
 2 - PP
 •
 Peristaltico

Optional

•
•
•
•
•

DATI TECNICI

Dimensioni Esterne	655x785x1480	LxPxH mm
Ingombro porta aperta	1930	mm
Altezza massima lavaggio	400	mm
Passaggio Utile	430	mm
Dimensioni cestello	500x500	mm
Volume vasca	20	lt
Consumo Acqua	2,6	lt/Ciclo
Pompa lavaggio	0,52	kW
Resistenza vasca	3	kW
Resistenza boiler	6	kW
Potenza installata	6,52	kW
Cicli lavaggio	120/180	Sec
Produzione oraria	30/20	Cicli/H
Alimentazione Elettrica	400V/3N/50Hz	
Rumorosità	62	dBA
Peso	105	Kg
Acqua di alimentazione	55/7-12	C/°f
	1,5/3	bar

ACCESSORI

Tubi (1 per tipo): Carico/Scarico acqua, Trasparente per brillantante con pescante
 Cestelli: 1x18 Piatti, 1 Cesto Universale, 2 Porta Posate

DISEGNI TECNICI

