


POT & UTENSIL WASHER

VS P57-62N



STANDARD FEATURES

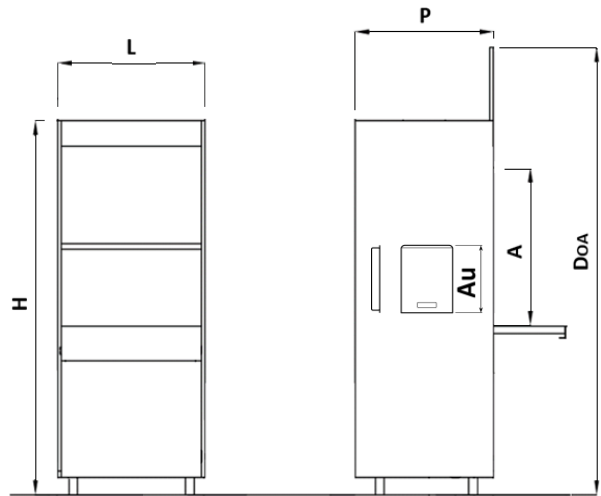

Control panel	ELECTRONIC EVO2
Wash arm	2 - Stainless steel
Rinse arm	2 - Stainless steel
Detergent injector	Optional
Rinse aid injector	-
Peristaltic rinse aid injector	Standard
Break tank	Standard
Water softener	Optional
Drain pump	Optional
Diagnose Wi-Fi	Optional

TECHNICAL FEATURES

External size	685x720x1690	LxPxH	[mm]
Overall size	1.860	DOA	[mm]
Clearance	620	A	[mm]
Maximum height for crockery	595	Au	[mm]
Rack size	570x620		[mm]
Tank size	30		[lt]
Rinse water consumption	2,6		[lt]
Wash pump	1,42		[kW]
Tank heater element	3,0		[kW]
Booster heater element	10,0		[kW]
Installed load	11,4		[kW]
Cycles	60 / 120 / 180 / 480		[sec]
Output cycles per hour	60 / 30 / 20 / 8		[cycle/h]
Electrical supply	400V/3N/50Hz		
Noise	69		[dBA]
Weight	124		[kg]

Theoretical data with water supply at 55°C

Where water hardness exceeds 8,43°e, a water softener is required. Not suitable for hot water over 30°C

Dimension depending on the type of basket used.



STANDARD EQUIPMENT

Hoses (1 for each): Water connection, drain, transparent for rinse product
1x24 plates, 1 universal basket, 1 baking-tray rack, 1 cutlery racks

GENERAL FEATURES

- Double-skinned cabinet and door, made of stainless inox AISI 304.
- Press-moulded wash tank with radial corners, inclined to filters.
- Easy-clean-dual-filter system.
- Two wash and two rinse stainless-inox arms, independent and rotary.
- Peristaltic rinse aid auto-dosing unit, adjustable from control panel.
- Stand-by system for energy saving.
- HY-NRG rinse function with break tank, pressure booster pump and insulated atmospheric boiler keeps the set temperature and quantity of water used in for rinse at constant levels.
- Electronic control panel with high-resolution colour TFT 45x60mm screen for easy use of the machine.
- Four purpose-designed washing cycles for various types of crockery to be washed.
- Two menu levels: an operator and a technical menu, protected by a pin code (after-sales service).
- Counter of daily and total number of cycles.

PERFORMANCES

Supply water temperature	55°C nom.	15	20	25	30	35	40	45	50	55	60	[°C]
Maximum cycles feasible in continuous operation	48	48	48	48	48	48	48	48	48	48	48	[rack/h]
Total spending power from single-skin machine	-	-	-	-	-	-	-	-	-	-	-	[kW]
Total spending power from double-skin machine	10,99	10,83	10,83	10,83	10,83	10,83	10,83	10,83	10,83	10,99	9,99	[kW]
Sensible heat emitted into the room from single-skinned machine	-	-	-	-	-	-	-	-	-	-	-	[kW]
Sensible heat emitted into the room from double-skinned machine	1,75	1,75	1,75	1,75	1,75	1,75	1,75	1,75	1,75	1,75	1,75	[kW]
Latent heat emitted into the room	4,29	3,29	3,41	3,53	3,64	3,77	3,89	4,02	4,15	4,29	4,43	[kW]
Emitted standby power with closed door in single-skin machine	-	-	-	-	-	-	-	-	-	-	-	[kW]
Emitted standby power with closed door in double-skin machine	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	[kW]